



ANTENNA EXPERTS

E-mail: info@antennaexperts.in Website: www.antennaexperts.in

Model JC-134-174


134 – 174 MHz.

-2 to 0 dBi. Gain

JAMMER COLLINEAR ANTENNA

DESIGN FEATURES: The JC-134-174 Jammer Collinear Antenna is rugged all weather model, enclosed in a Fiber Glass enclosure, uses high class aluminum alloy and does not require any field tuning or adjustments. This fiber glass jammer collinear antenna is specially designed to mount on the roof-top hole of the vehicle or can be supplied to mount the antenna directly on the jammer equipments. The JC-134-174 antenna is highly suitable for man-pack and vehicle mounting applications. Similarly the antenna can also be supplied with pole mounting hardware (optional).

CONSTRUCTIONS: The special co-axial stub and spark gap techniques are used for smooth VSWR and gain over entire the 134 - 174 MHz frequency band. The jammer collinear antenna consists of large diameter brass radiating elements stacked vertically, fed in phase and enclosed in fiber glass housing. The Fiber Glass has excellent transparency for Radio Signal and mechanically Robust to support extra mechanical strength to the collinear antenna. The antenna supplied with olive green colour for defense application.

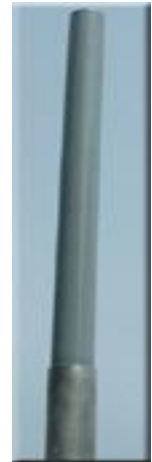

ELECTRICAL SPECIFICATIONS:	
Frequency Range	134 - 174 MHz.
Gain	-2 to 0 dBi.
Bandwidth	40 MHz.
Polarization	Vertical
Input Impedance	50 Ohms
Radiation Pattern	Omni-directional
Vertical Beam-width –Half Power Points	78 Degrees
VSWR	1:2
RF Power Handling Capacity	500 Watts
Input Termination	N-Female

MECHANICAL SPECIFICATIONS:	
Wind Rating	200 Km/Hr.
Overall Length	800 mm
Shipping Length	900 mm
Support Pipe Materials	Aluminum
Enclosure Materials	Fiberglass
Enclosure Outer Diameters	44 mm
Enclosure Length	650 mm
Radiating Elements - Materials	All Brass
Gross Weight	1.5 Kgs.

ENVIRONMENTAL SPECIFICATIONS:	
Operating Temperature	(-) 30 to +70 Degrees Celsius
Storage Temperature	(-) 40 to +80 Degrees Celsius
Humidity	0 to 95 % RH