



# ANTENNA EXPERTS

E-mail: [info@antennaexperts.in](mailto:info@antennaexperts.in) Website: [www.antennaexperts.in](http://www.antennaexperts.in)

Model # AVM-75

66 – 88 MHz.


Unity Gain

## VEHICLE MOUNT WHIP MOBILE ANTENNA

**DESIGN FEATURES:** The AVM-75 UHF vehicle mount antenna is all brass antenna uses base loading technique for smooth impedance matching. Air-cored base loading coil keeps the losses to minimum.

**CONSTRUCTIONS:** This Whip Mobile Antenna comes with a 3.5 Meters long RG-58 Coaxial Cable with N-Male Connector. The customized length of cable and connector can be supplied on request.

**MOUNTING:** The AVM-75 vehicle mount antenna can be mounted either roof of the vehicle or on the side of vehicle using the "L" type bracket, supplied with the antenna.

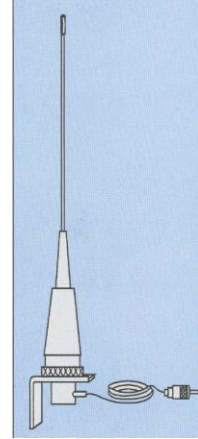

### ELECTRICAL SPECIFICATIONS:

Frequency Range	66 - 88 MHz.
Gain	2.15 dBi.
Bandwidth	2.5 MHz.
Polarization	Vertical
Input Impedance	50 Ohms
Radiation Pattern	Omni-directional
Vertical Beamwidth –Half Power Points	72 Degrees
VSWR	1.5 : 1
RF Power Handling Capacity	250 Watts
Input Termination	N-Male

### MECHANICAL SPECIFICATIONS:

Weight	0.6 Kgs.
Wind Rating	150 Km/Hr.
Whip Elements	Stainless Steel
Whip Diameter	3.3 mm
Coil Housing	Nylon
Base Diameter	33 mm
Base Material	Brass
Coaxial Cable	RG-58
Cable Length	3.5 Meters
Shipping Length	1.2 Meter
Radiating Material	Stainless Steel

### ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature	(-)30 to +70 Degrees Celsius
Storage Temperature	(-)40 to +80 Degrees Celsius
Humidity	0 to 95% RH

Note: All information contained in the datasheet is subject to change without any prior notice.